

rtc[®]
COUPLING TECHNOLOGY



468.08
rtc TYPE



Compatible - Kompatibilität

rtc	033
Rectus	33
Atlas Copco	QIC10

Temperature Range - Temperaturbereich

Nitrile (N)	-20°C + 110°C (-4°F + 230°F)
FPM (V)	-20°C + 180°C (-4°F + 356°F)
EPDM (Ethylene Propylene)	-40°C + 150°C (-40°F + 302°F)

Working Pressure - Betriebsdruck

25 Bar (360 PSI)

Connction / Disconnection Max. Pressure -

Ein- und Auskuppelbar bis Max. Druck
15 Bar (220 PSI)

Flow size - Nennweite

rtc type 468.08 8mm (3/8")

Standard version - Standardversion

Seals - Dichtung : Nitrile (N)

Material of Standard Coupler / Material für die Standardversion

Body / Housing -	Steel tenifer threaded
Kupplungsgrundkörper/Gehäuse	Stahl teneferiert
Inner Part / Cylinder -	Surface hardened steel
Innenteil / Zylinder	Zinc-nickel plated
Back Part - Hinterteil	Stahl gehärtet, Zink-Nickel beschichtet
Sleeve -	Steel zinc plated - Stahl verzinkt
Hülse	Zinc diecasted, nickel plated & orange plastic coated
Plugs - Federn	Stainless steel - Edelstahl
Seals - Dichtungen	Nitrile (N)
Plug -	Surface Hardened Steel, Galvanized
Nippel	Stahl gehärtet, verzinkt

Advantages

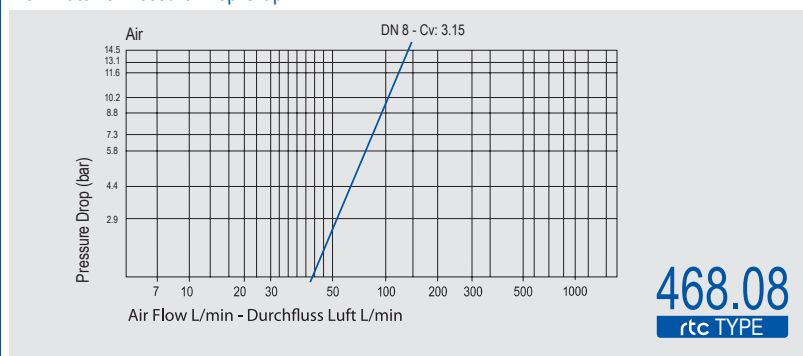
- The system perfectly fits to the **ISO 4414**, **EN 983** safety requirements.
- Through flow, minimum pressure loss.
- Negligible Connecting Force
- Smart and Ergonomic features
- Ease of Handling
- Optimised Size

Vorteil

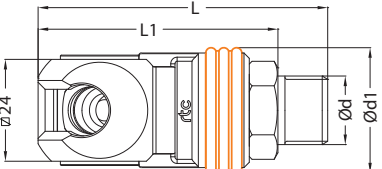
- Sicherheit gemäß **ISO 4414**, **EN 983**
- Voller Durchgang, sehr geringer Druckverlust
- Einfache Bedienung, sehr geringe Kuppelkraft
- Kompakte Bauform



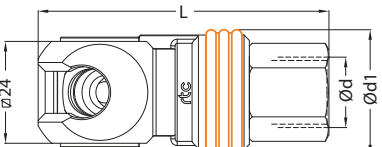
Flow Rate vs Pressure Drop Graph



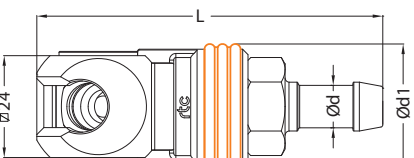
rtc TYPE 468.08 Male thread socket / Kupplung mit Aussengewinde

Socket / Kupplung	Size / Größe	Alternative Order No Alternative BestellNr.	Order No / BestellNr.	Ød	Ød1	L	L1	HEX.
	8	-	468.08 SMO 13	BSP 1/4	30	69.5	58.5	20
	8	-	468.08 SMO 17	BSP 3/8	30	69.5	58.5	20
	8	-	468.08 SMO 21	BSP 1/2	30	71.5	59.5	22
	8	-	468.08 STO 13	NPT 1/4	30	70.5	56.5	20
	8	-	468.08 STO 17	NPT 3/8	30	71.5	57.5	20
	8	-	468.08 STO 21	NPT 1/2	30	78.5	59.5	22

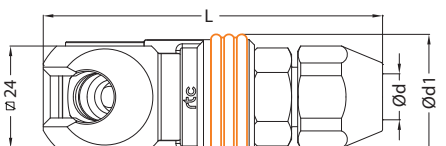
rtc TYPE 468.08 Female thread socket / Kupplung mit Innengewinde

Socket / Kupplung	Size / Größe	Alternative Order No Alternative BestellNr.	Order No / BestellNr.	Ød	Ød1	L	L1	HEX.
	8	-	468.08 SFO 13	BSP 1/4	30	68.5	-	20
	8	-	468.08 SFO 17	BSP 3/8	30	68.5	-	20
	8	-	468.08 SFO 21	BSP 1/2	30	69.5	-	24
	8	-	468.08 SNO 13	NPT 1/4	30	68.5	-	20
	8	-	468.08 SNO 17	NPT 3/8	30	68.5	-	20
	8	-	468.08 SNO 21	NPT 1/2	30	69.5	-	24


rtc TYPE 468.08 Socket with hose barb / Kupplung mit Schlauchanschluss

Socket / Kupplung	Size / Größe	Alternative Order No Alternative BestellNr.	Order No / BestellNr.	Ød	Ød1	L	L1	HEX.
	8	-	468.08 SHO 06	Ø6 - 1/4	30	79	-	-
	8	-	468.08 SHO 08	Ø8 - 5/16	30	79	-	-
	8	-	468.08 SHO 10	Ø10 - 3/8	30	79	-	-
	8	-	468.08 SHO 13	Ø13 - 1/2	30	79	-	-


rtc TYPE 468.08 Socket with plastic hose connection / Kupplung mit Kunststoffschlauchanschluss

Socket / Kupplung	Size / Größe	Alternative Order No Alternative BestellNr.	Order No / BestellNr.	Ød	Ød1	L	L1	HEX.
	8	-	468.08 SVO 0610	6.5x10	30	80	-	22
	8	-	468.08 SVO 0812	8x12	30	80	-	22
	8	-	468.08 SVO 1116	11x16	30	84	-	27


rtc TYPE 468.08 Plug with male thread / Nippel mit Aussengewinde

Plug / Nippel	Size / Größe	Alternative Order No Alternative BestellNr.	Order No / BestellNr.	Ød	Ød1	L	L1	HEX.
	8	-	468.08 PRF 13	BSPT 1/4	-	41.5	29.5	14
	8	-	468.08 PRF 17	BSPT 3/8	-	43	31	19
	8	-	468.08 PRF 21	BSPT 1/2	-	50.5	33.5	22
	8	-	468.08 PTF 13	NPT 1/4	-	41.5	29.5	14
	8	-	468.08 PTF 17	NPT 3/8	-	43	31	19
	8	-	468.08 PTF 21	NPT 1/2	-	50.5	33.5	22

Plug with female thread / Nippel mit Innengewinde TYPE 468.08 **rtc**

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	-	468.08 PFF 13	BSP 1/4	-	41.5	-	17
	8	-	468.08 PFF 17	BSP 3/8	-	43	-	19
	8	-	468.08 PFF 21	BSP 1/2	-	47	-	24
	8	-	468.08 PNF 13	BSP 1/4	-	41.5	-	17
	8	-	468.08 PNF 17	BSP 3/8	-	43	-	19
	8	-	468.08 PNF 21	BSP 1/2	-	47	-	24

Plug with hose barb / Nippel mit Schlauchanschluss TYPE 468.08 **rtc**

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	-	468.08 PHF 06	Ø6 - 1/4	14	50	-	-
	8	-	468.08 PHF 08	Ø8 - 5/16	14	53	-	-
	8	-	468.08 PHF 10	Ø10 - 3/8	16	53	-	-
	8	-	468.08 PHF 13	Ø13 - 1/2	16	53	-	-

Coupling head protective cover - Schutzhauben für Schwenkkupplungen TYPE HPC **rtc**

	Suitable for series Geeignet für Serien	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ø
Material: Polyamide Werkstoff: Polyamid	462.06 / 460.06 / 461.06 / 465.08 / 466.06 / 467.06	R295 00 385	HPC 0620	20
	463.08 / 464.08 / 460.08 / 461.08	R295 00 340	HPC 0825	25
	460.11 / 461.11	R295 00 531	HPC 1130	30




Coupling body protective cover - Schutzhülsen für Schwenkkupplungen TYPE BPC **rtc**

	Suitable for series Geeignet für Serien	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ø
Material: Vinyl Werkstoff: Vinyl	462.06 / 460.06 / 461.06 / 465.08 / 466.06 / 467.06	R295 00 480	BPC 0620	20
	463.08 / 464.08 / 460.08 / 461.08	R295 00 481	BPC 0825	25
	460.11 / 461.11	R295 00 482	BPC 1130	30




Plastic hose protective spiral guard - Knickschutz für Spiralschlauch TYPE HGS **rtc**

	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød
Material: Polyamide Werkstoff: Polyamid	-	HGS 0610	6.5x10
	R295 00 337	HGS 0812	8x12
	R295 00 401	HGS 1116	11x16